

laser safety goggle R14T1D01L




Article number: R14T1D011003
 GTIN: 4050369019539
 Unit:
 Weight incl. packaging: 0,62 kg
 Weight excl. packaging: 0,19 kg

Highlights

- Protection levels acc. to EN 207
- Application: CO₂, CO Laser at 10600 or 5400nm
- 6 different frame styles
 available: [F20](#), [F46](#), [R01](#), [R02](#), [R14](#) and [R17](#)
- Unrestricted colour view and highest VLT
- Different wearing or frame options


The laservision laser safety goggle R14.T1D01.1003 with lip seal (L) offers very high protection levels within the IR spectral range (5400, 9000-11.500nm). The goggle with its colorless filters can be worn over large corrective glasses. The changeable click frame with lip seal characterizes a very good wearing comfort. The shipment includes a metal box which can also be used as a storage box.

Color view



Transmission der Signalfarben nach DIN EN 172 //
 transmission of signal colours acc. to EN 172

Filter curve

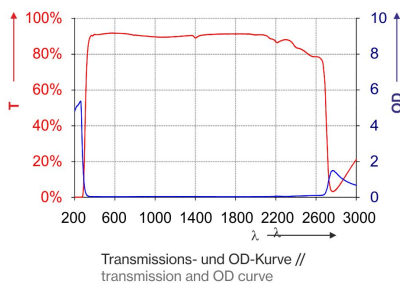

Transmissions- und OD-Kurve //
 transmission and OD curve

COATING:	no coating
FILTER CURVATURE:	Flat filter
PROTECTION CLASS / NORM:	EN 207 full protection
CUSHION:	Lip seal (L)
FRAME TYPE:	Goggle with strap
PROPERTIES:	Neutral glass lamination
FRAME:	R14
FILTER:	T1D01
FILTER COLOUR:	Colourless
COLOUR RECOGNITION:	Excellent
FILTER THICKNESS:	ca. 5mm
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
PROTECTION RANGE:	Infrared
VISUAL BRIGHTNESS:	Excellent
VLT (APPROX.):	90%

laser safety goggle R14T1D01L

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
5400 - 5400	(OD5+)	D LB5 + I LB5Y + R LB2
9000 - 11500	(OD10+)	D LB5 + I LB5Y + R LB2