

laser safety spectacle R17T1D01




Article number: R17T1D011001
GTIN: 4050369012202
Unit: piece
Weight incl. packaging: 0,48 kg
Weight excl. packaging: 0,14 kg

Highlights

- Protection levels acc. to EN 207
- Application: CO₂, CO Laser at 10600 or 5400nm
- 6 different frame styles
available: [F20](#), [F46](#), [R01](#), [R02](#), [R14](#) and [R17](#)
- Unrestricted colour view and highest VLT
- Different wearing or frame options


The laservision laser safety eyewear R17.T1A01.1001 provides high protection ratings within the IR-spectral area (5,400, 9,000-11,500nm). The full-protection spectacle without additional coating can be combined with an RX- corrective insert. The external reinforced spectacle with clear filters offers a good view field. The spectacle is delivered in a metal box, which can also be used as a storage box. Within the scope of delivery is also a holding band.

Color view



Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filter curve

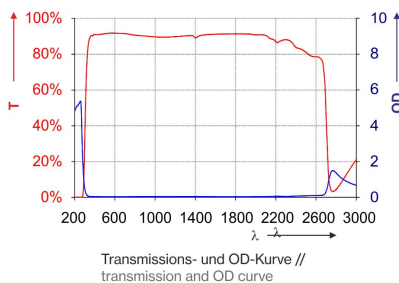

Transmissions- und OD-Kurve //
transmission and OD curve

COATING:	no coating
FILTER CURVATURE:	Flat filter
PROTECTION CLASS / NORM:	EN 207 full protection
CUSHION:	No cushion
FRAME TYPE:	Spectacle with Rx insert option
PROPERTIES:	Adjustable temples Neutral glass lamination
FRAME:	R17
FILTER:	T1D01
FILTER COLOUR:	Colourless
COLOUR RECOGNITION:	Excellent
FILTER THICKNESS:	ca. 5mm
FILTER MATERIAL:	Mineral glass
FILTER TECHNOLOGY:	Absorption filter
PROTECTION RANGE:	Infrared
VISUAL BRIGHTNESS:	Excellent
VLT (APPROX.):	90%

laser safety spectacle R17T1D01

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
5400 - 5400	(OD5+)	DI LB5 + R LB2
9000 - 11500	(OD10+)	DI LB5 + R LB2