


laservision

laser safety spectacle R14T1K04F




Article number: R14T1K041002
GTIN: 4050369019423
Unit: piece
Weight incl. packaging: 0,62 kg
Weight excl. packaging: 0,18 kg

Color view

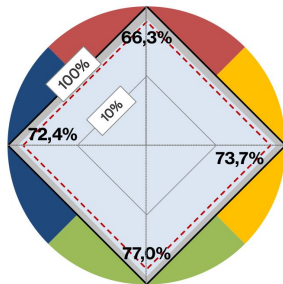

Transmission der Signalfarben nach DIN EN 172 //
transmission of signal colours acc. to EN 172

Filter curve

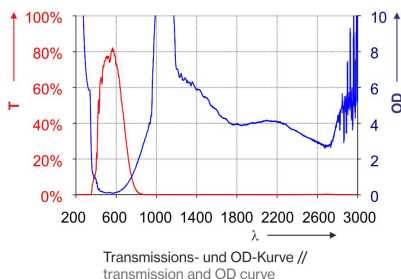

Transmissions- und OD-Kurve //
transmission and OD curve

Highlights

- Very high protection levels certified acc. to EN 207
- Coated, absorbing mineral glass
- Application IR-Fiber, -Disc-, Nd:YAG- and CO₂ lasers
- 5 different frame styles: [F20](#), [R01](#), [R02](#), [R14](#) and [R17](#)
- Unrestricted colour recognition and very high VLT (77%)

The laservision laser safety goggle R14.T1K04.1003 with a foam frame (F), provides high protection ratings for YAG and fiber lasers within the NIR and IR spectral area (1,030-1,100nm; 5,400 and 9,000-11,000nm). The OTG goggle with light grey, coated filters can be worn over average large correction glasses. The exchangeable clip frame with foam (A14FORUB1000) lends this OTG goggles a unique and good wearing comfort. The laser safety goggle comes with a metal box, which can also be used as a storage box.

COATING:	Interference Coating (PVD)
FILTER CURVATURE:	Flat filter
PROTECTION CLASS / NORM:	EN 207 full protection
CUSHION:	Soft foam (F)
FRAME TYPE:	Goggle with strap
PROPERTIES:	M-protection rating Neutral glass lamination
FRAME:	R14
FILTER:	T1K04
FILTER COLOUR:	Light grey
COLOUR RECOGNITION:	Excellent
FILTER THICKNESS:	ca. 4mm
FILTER MATERIAL:	Coated glass
FILTER TECHNOLOGY:	Absorption filter Reflection filter
PROTECTION RANGE:	Coated filter Infrared near infrared
VISUAL BRIGHTNESS:	Very good
VLT (APPROX.):	77%

laser safety spectacle R14T1K04F

WAVELENGTH	OD	OPERATING MODE / TESTED PROTECTION LEVEL
1030 - 1100	(OD9+)	D LB8 + IRM LB9
2000 - 2200	(OD2+)	DI LB2 + R LB1
5400 - 5400	(OD4+)	D LB3 + I LB4 + R LB2
9000 - 11000	(OD4+)	D LB3 + I LB4 + R LB2